


Basic TimeTec Device Installation

Guide (TC10)



Table of Content	Page
1. Overview	1
2. Device Installation	2
3. Standalone Installation	3
4. Door Sensor & Exit Button	3
5. Lock Relay Connection	4
6. Power Connection	4
7. Support & Contact Information	5

1. Overview

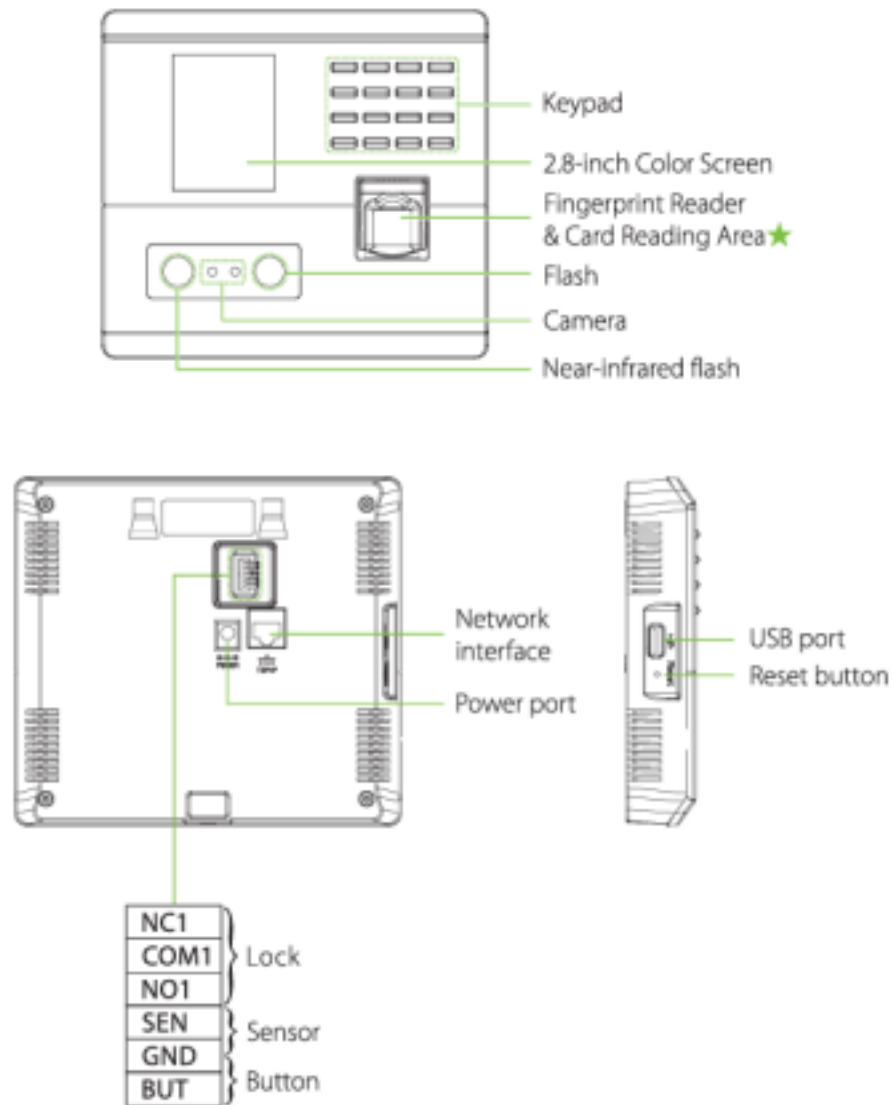


Note: Features and parameters with ★ mark are not available in all devices.


2. Device Installation

❖ Install on the wall


1. Attach the mounting template sticker to the wall, and drill holes according to the mounting paper.
2. Fix the back plate on the wall using the mounting screws.
3. After passing the wires through the wiring hole and connecting them to the device, and then attach the device to the back plate from top to bottom.
4. Fasten the device to the back plate with a security screw.

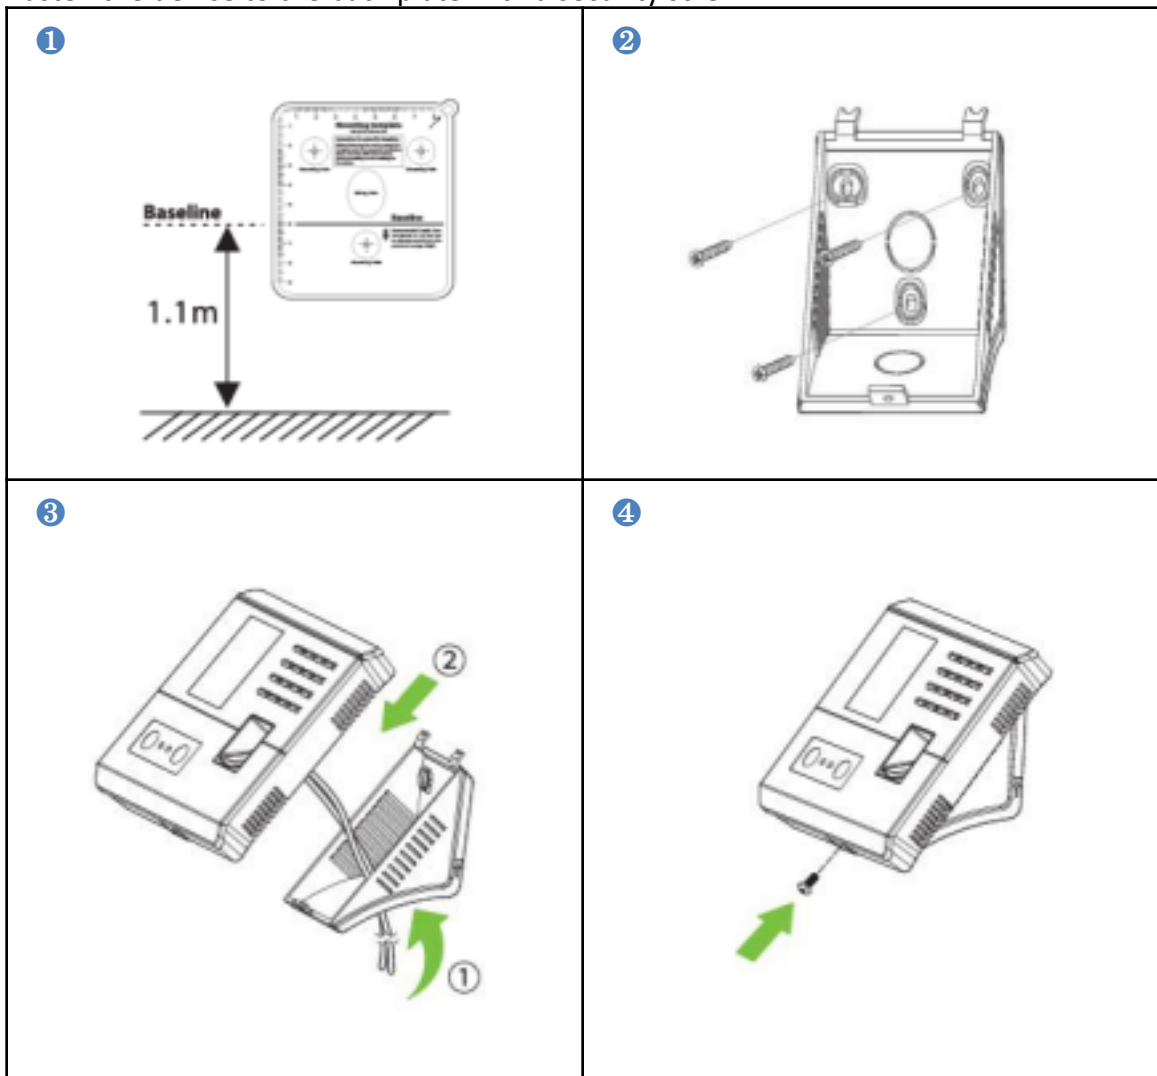

3. Standalone Installation

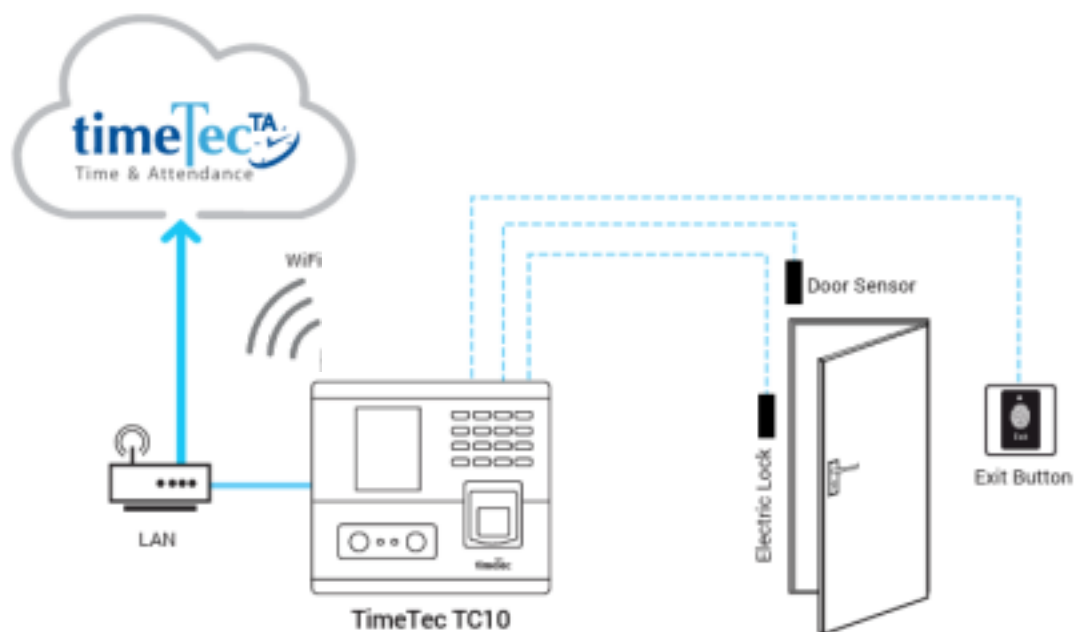


4. Door Sensor & Exit Button

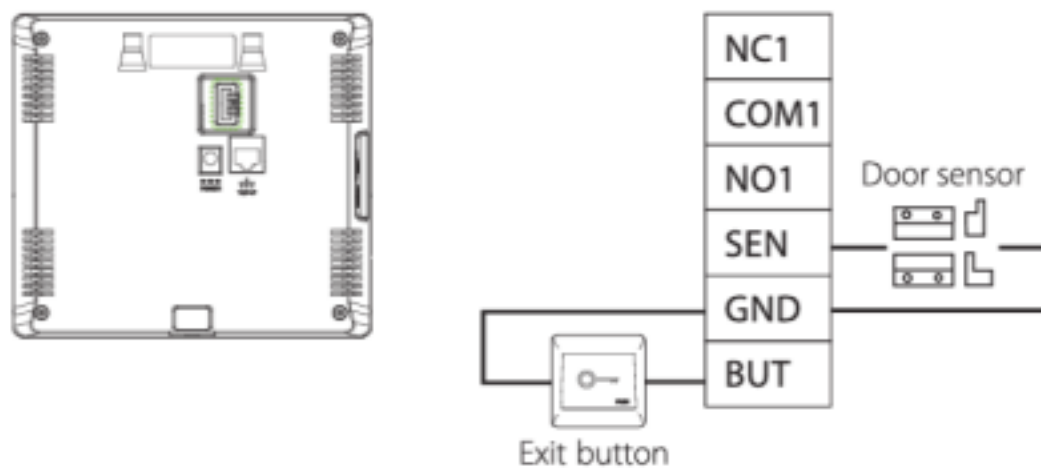


5. Lock Relay Connection

The system supports Normally Opened Lock and Normally Closed Lock. The **NO LOCK** (normally unlocked when powered) is connected with '**NO**' and '**COM**' terminals, and the **NC LOCK** (normally locked when powered) is connected with '**NC**' and '**COM**' terminals. Take NC Lock as an example below:

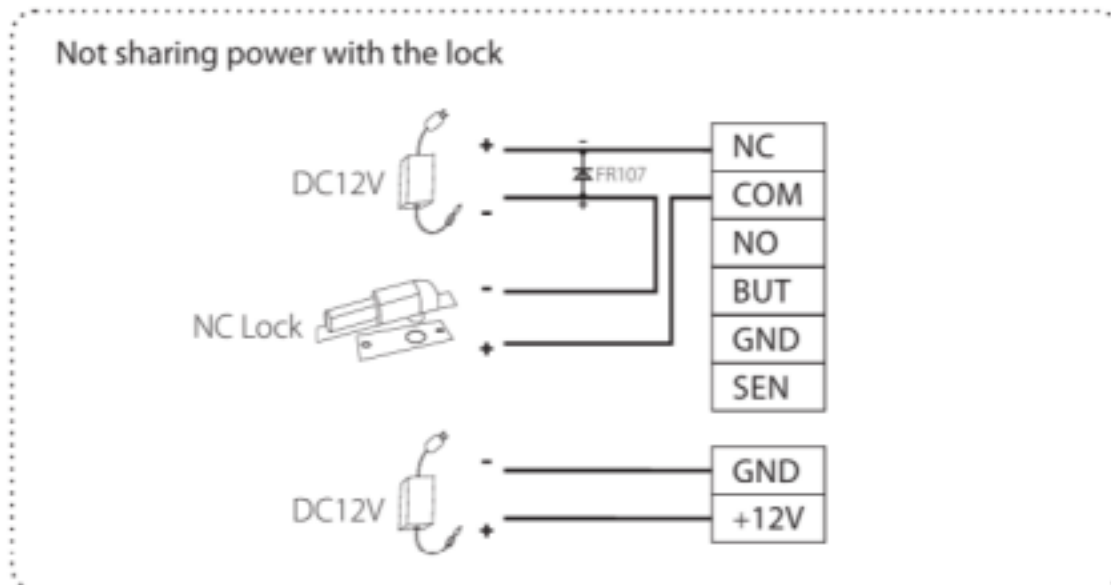

6. Power Connection

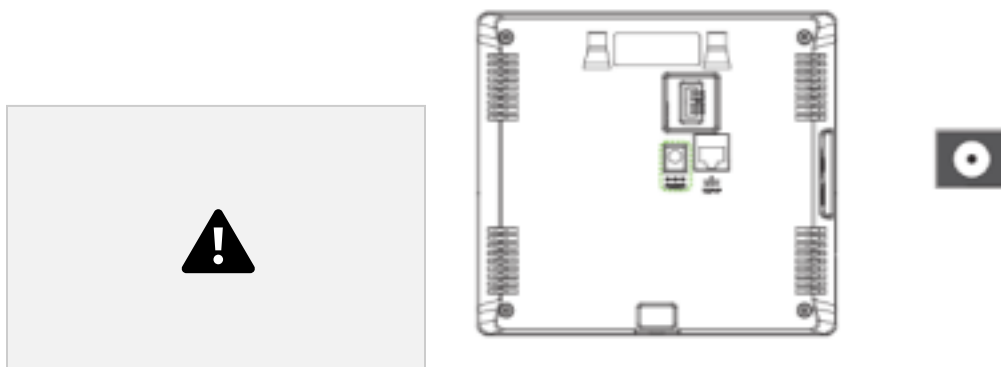

- Recommended AC adapter: 12V, 1.5A
- To share the power with other devices, use an AC adapter with higher current ratings.

7. Support & Contact Information

Live Chat: Click the dialog icon at the bottom right of your BrioHR account.

Email: support@briohr.com

Operational Hours: Monday to Friday, 9:00 AM - 6:00 PM (Malaysia Time, UTC+8.00)
(including public holidays)